arXiv:1301.5690v1 [quant-ph] 24 Jan 2013

Synthesizing continuous-variable entangled states of microwave fields with cavity electromechanics

Peng-Bo Li, Shao-Yan Gao, and Fu-Li Li

Department of Applied Physics, Xi'an Jiaotong University, Xi'an 710049, China

E-mail: `lipengbo@mail.xjtu.edu.cn`

Abstract. We investigate a circuit cavity electromechanical system, where two superconducting coplanar waveguide cavities (CPWC's) are capacitively coupled by a nanoscale mechanical resonator (MR). We show that, with this electromechanical system, two-mode continuous-variable entangled states of microwave electromagnetic fields can be synthesized deterministically either via coherent control on the dynamics of the system, or through a dissipative quantum dynamical process. The first scheme operates in the strong coupling regime, and is insensitive to the initial thermal noise, while the second one exploits the mechanical dissipation as a useful resource and only needs high frequency low-Q mechanical oscillators. These protocols may open up promising perspectives for quantum information processing with cavity electromechanics.

1. Introduction

Circuit cavity electromechanics [1, 2, 3, 4], the counterpart of cavity optomechanics [5, 6] in the form of electrical circuits, describes the parametrical coupling between the motion of a micro or nanoscale MR and an electrical circuit. The underlying physics of cavity electromechanics is that the motion of the mechanical oscillator modulates the capacitance of the electrical circuit, thus creating parametrical coupling between these two systems. Compared to their optomechanical analogues, electromechanical systems have the advantages that these low-loss superconducting circuits are easily cooled to ultralow temperatures [7], and can be fabricated on a single chip using the standard optical lithographic techniques. Recent experimental and theoretical progress has shown that cavity optomechanics and electromechanics are pretty useful for macroscopic tests of the fundamental laws of quantum mechanics, or for other practical applications relevant with quantum phenomena [8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31]. Of particular interest is the generation of non-classical motional, photonic and hybrid quantum states for basic tests of quantum theory, as well as applications in quantum information processing [32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47].

In this work, we study a circuit cavity electromechanical system consisting of two superconducting CPWC's and a nanoscale or micro MR. In this proposal, the superconducting cavities are capacitively coupled by a capacitor that incorporates the nanoscale or micro MR into its electrode plates, and is biased by a driving voltage. We show that, through suitably choosing the driving frequencies of the voltages, we can generate various linear operations between cavity photons and mechanical phonons on demand. In particular, with this circuit electromechanical system we present two different protocols for synthesizing continuous-variable entangled states of microwave electromagnetic fields based on currently available experimental setups. The first protocol, operating in the strong coupling regime, relies on coherent control over the dynamics of the system and is insensitive to the initial thermal noise. The second one is based on a dissipative quantum dynamical process, which exploits the mechanical dissipation as a resource and only needs high frequency low-Q mechanical oscillators. These protocols may have promising applications for continuous-variable quantum information processing with cavity electromechanics.

2. Coupling two superconducting CPWC's via a MR

As shown in Fig.1, we consider the electromechanical system where two superconducting CPWC's are capacitively coupled by a nanoscale or micro MR, which is driven by a gate voltage V_x. To implement this scheme, the superconducting CPWC's are electrically connected with a capacitor biased by a driving voltage. The capacitor is formed by two parallel metal plates, one of which is replaced by a metallic membrane realizing the MR (drum resonator) [2]. Alternatively, one can choose to use a micromechanical

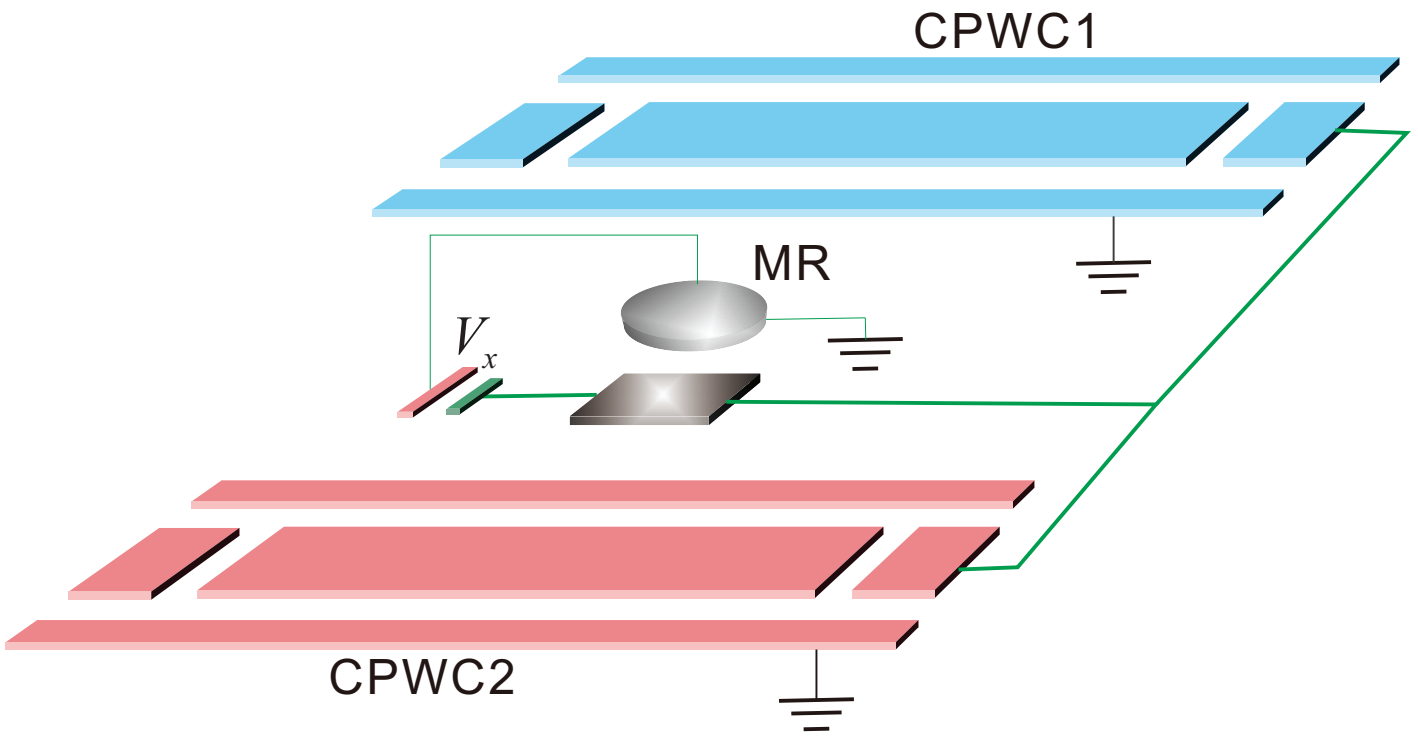

Figure 1. (Color online) The schematic of two superconducting CPWC's capacitively coupled by a nanoscale MR, which is driven by a gate voltage V_x.

bulk dilatational resonator, as recently used in the experiment to couple with a phase qubit [7]. The working frequency of these MR's is in the range of GHz, and they can couple to the CPWC's through interdigitated capacitors. In both cases, the capacitance C of the capacitor is dependent on the MR displacement $X = \sqrt{\hbar/(2m\omega_m)}(\hat{b}+\hat{b}^\dagger)$, where m is the mass of the MR, ω_m the mechanical vibration frequency, and $\hat{b}$ the annihilation operator for the MR. If we assume that the displacement is much smaller than the equilibrium distance d between the metallic membrane and the metallic base electrode, then the capacitance approximately becomes $C = C_0(1 + X/d)$, where C_0 is the capacitance for the MR in equilibrium.

For a superconducting CPWC [48], the voltage at position x is

$$V_j(x) = \sqrt{\frac{\hbar\omega_j}{C_j}}(\hat{a}_j^\dagger + \hat{a}_j)\cos(2\pi x/L_j), (j = 1, 2), \tag{1}$$

where ω_j is the resonant frequency, C_j the total capacitance, $\hat{a}_j$ the annihilation operator, and L_j the length for the jth CPWC respectively. With a coupling capacitance C between these CPWC's, the coupled interaction can be derived as

$$H_I = \frac{1}{2}C_0(1 + X/d)(V_1(0) + V_2(0) - V_x)^2. \tag{2}$$

We subsequently perform a rotating-wave approximation to simplify the coupled interaction. After neglecting rapidly oscillating and other higher order terms, the Hamiltonian describing the coupled system can be derived as

$$\begin{aligned}\mathscr{H} &= \hbar\omega_1\hat{a}_1^\dagger\hat{a}_1 + \hbar\omega_2\hat{a}_2^\dagger\hat{a}_2 + \hbar\omega_m\hat{b}^\dagger\hat{b} \\ &\quad - \hbar g_1(t)(\hat{b}+\hat{b}^\dagger)(\hat{a}_1+\hat{a}_1^\dagger) - \hbar g_2(t)(\hat{b}+\hat{b}^\dagger)(\hat{a}_2+\hat{a}_2^\dagger)\end{aligned} \tag{3}$$

where $g_j(t) = \frac{C_0}{d}\sqrt{\frac{\omega_j}{2m\omega_m C_j}}V_x(t)$, and we have included the free Hamiltonian of the two CPWC's and MR in the first three terms. The last two terms in Eq. (3) are the linear interaction between the CPWC's and the MR. Up to now the result is valid for arbitrary driving voltage signals. Through adjusting the driving frequency of the voltage, we can generate various linear operations. For instance, the beam-splitter interaction between two cavity modes and the mechanical mode, as discussed in Ref. [49, 50] to realize intracavity state transfer, can be recovered from Hamiltonian (3) by choosing $V_x(t) = V_x^0 \cos\omega_d t$ and setting $\omega_d = \omega_1 - \omega_m = \omega_2 - \omega_m$. In this way, the modulation of the coupling strength provides an effective tool for controlling the interaction between the CPWC's and the MR. In the following section, we will show how to prepare two-mode squeezed states of the CPWC's through engineering the desired interaction between photons and phonons.

3. Generating continuous-variable entanglement between the CPWC's

We now consider the case where the MR is driven by a gate voltage of the form $V_x(t) = V_x^1 \cos(\omega_d^1 t) + V_x^2 \cos(\omega_d^2 t + \phi)$, where ϕ is a fixed phase difference between the voltage components. If we choose the driving frequencies as $\omega_d^1 = \omega_1 + \omega_m, \omega_d^2 = |\omega_m - \omega_2|$, corresponding to the blue sideband and red sideband driving for the MR, then under the rotating-wave approximation we can obtain the Hamiltonian in the interaction picture

$$\mathscr{H} = -\hbar\Theta_1(\hat{a}_1^\dagger \hat{b}^\dagger + \hat{a}_1 \hat{b}) - \hbar\Theta_2(\hat{a}_2^\dagger \hat{b} + \hat{a}_2 \hat{b}^\dagger), \tag{4}$$

where

$$\Theta_j = \frac{C_0}{2d}\sqrt{\frac{\omega_j}{2m\omega_m C_j}} V_x^j, \quad (j = 1, 2).$$

The Hamiltonian (4) describes a system of three coupled harmonic oscillators with controllable coefficients [51, 52, 53]. The first term describes simultaneous creation or annihilation of a photon in CPWC1 and a phonon and is responsible for entangling the CPWC1 and the MR, while the second term describes the exchange of excitation quanta between the CPWC2 and the motion. These terms together will lead the CPWC's to be entangled with each other. In what follows, we will discuss two different schemes to realize this goal, one of which is based on coherent control on the dynamics of the system, while the other is through a dissipative quantum dynamical process.

3.1. Dynamical generation of two-mode squeezed states

We first focus on the regime where the dissipative effects on the coherent dynamics can be neglected, i.e., the strong coupling regime, $\{\Theta_1, \Theta_2\} \gg \{\kappa_1, \kappa_2, n_{th}\gamma_m, \gamma_m\}$, where κ_j is the jth CPWC field decay rate, n_{th} is the thermal equilibrium occupation number for the mechanical mode at temperature T, and γ_m is mechanical dissipation rate. This regime can be easily realized, since the coupling strength Θ_j can be tuned by the classical driving amplitude V_x^j, and high-Q superconducting CPWC's and MR's can be conveniently fabricated in the laboratory. In this limit the coherent dynamics of the coupled system can be easily solved in the Heisenberg representation.

The Heisenberg equations of motion read

$$\dot{\hat{a}}_1 = i\Theta_1 \hat{b}^\dagger, \tag{5}$$

$$\dot{\hat{a}}_2 = i\Theta_2 \hat{b}, \tag{6}$$

$$\dot{\hat{b}} \;= i\Theta_1\hat{a}_1^\dagger + i\Theta_2\hat{a}_2, \tag{7}$$

which would generate periodic dynamics provided that $|\Theta_2| > |\Theta_1|$. After some straightforward derivations, we can obtain the time evolution of the operators as

$$\begin{aligned}\hat{a}_1(t) &= \frac{i\Theta_1}{\Theta}\hat{b}^\dagger(0)\sin\Theta t + \frac{\Theta_1\Theta_2}{\Theta^2}[1-\cos\Theta t]\hat{a}_2^\dagger(0) + \frac{1}{\Theta^2}[|\Theta_2|^2 \\ &\quad - |\Theta_1|^2\cos\Theta t]\hat{a}_1(0), \qquad (8)\\ \hat{a}_2(t) &= \frac{i\Theta_2}{\Theta}\hat{b}(0)\sin\Theta t - \frac{\Theta_1\Theta_2}{\Theta^2}[1-\cos\Theta t]\hat{a}_1^\dagger(0) - \frac{1}{\Theta^2}[|\Theta_1|^2 \\ &\quad - |\Theta_2|^2\cos\Theta t]\hat{a}_2(0), \qquad (9)\\ \hat{b}(t) &= \hat{b}(0)\cos\Theta t + \frac{1}{\Theta}[i\Theta_2\hat{a}_2(0) + i\Theta_1\hat{a}_1^\dagger(0)]\sin\Theta t, \qquad (10)\end{aligned}$$

with $\Theta = \sqrt{|\Theta_2|^2 - |\Theta_1|^2}$. In general these solutions describe tripartite entanglement among cavity modes and the mechanical oscillator. However, we find at the instant $T_\pi = \pi/\Theta$ Eqs. (8)-(10) become

$$\begin{aligned}\hat{a}_1(T_\pi) &= \frac{|\Theta_1|^2+|\Theta_2|^2}{\Theta^2}\hat{a}_1(0) + \frac{2\Theta_1\Theta_2}{\Theta^2}\hat{a}_2^\dagger(0), \qquad (11)\\ \hat{a}_2(T_\pi) &= -\frac{|\Theta_1|^2+|\Theta_2|^2}{\Theta^2}\hat{a}_2(0) - \frac{2\Theta_1\Theta_2}{\Theta^2}\hat{a}_1^\dagger(0), \qquad (12)\\ \hat{b}(T_\pi) &= -\hat{b}(0). \qquad (13)\end{aligned}$$

Therefore, at this instant the motion is decoupled from the cavity modes and returns to its initial state. Moveover, at the time T_π the two cavity modes are entangled with each other.

To be more specific, we introduce the unitary operator $\hat{S}(\zeta) = e^{\zeta\hat{a}_1\hat{a}_2 - \zeta\hat{a}_1^\dagger\hat{a}_2^\dagger}$, where $\zeta = \tanh^{-1}[2r/(1+r^2)], r = |\Theta_2/\Theta_1|$. Then we find Eqs. (11) and (12) can be rewritten as

$$\begin{aligned}\hat{a}_1(T_\pi) &= \cosh\zeta\hat{a}_1(0) + \sinh\zeta\hat{a}_2^\dagger(0) = \hat{S}\hat{a}_1(0)\hat{S}^\dagger, \qquad (14)\\ \hat{a}_2(T_\pi) &= -(\cosh\zeta\hat{a}_2(0) + \sinh\zeta\hat{a}_1^\dagger(0)) = e^{i\pi}\hat{S}\hat{a}_2(0)\hat{S}^\dagger. \qquad (15)\end{aligned}$$

These results imply that at the instant T_π the time evolution operator of the whole system corresponds to $\hat{U}(T_\pi) = \hat{S}(\zeta)^\dagger \otimes \hat{I}_m$, where $\hat{I}_m$ is the identity operator for the mechanical mode. Thus, if initially the MR density matrix is a thermal state at temperature T given by

$$\varrho_m(0) = (1 - e^{-\hbar\omega_m/k_BT})e^{-H_m/k_BT} \tag{16}$$

where k_B is the Boltzmann constant, and $H_m = \hbar\omega_m(\hat{b}^\dagger\hat{b} + 1/2)$, then $\varrho_m(T_\pi) = \varrho_m(0)$ in the Schrödinger representation. Moveover, at the time T_π, the two cavity modes will be prepared in a two-mode squeezed state if the initial state is the vacuum state for both cavity modes, $|00\rangle_c$. In particular, using the factored form of the two-mode squeeze operator [54]

$$\hat{S}(\zeta) = (\cosh\zeta)^{-1}e^{-\hat{a}_1^\dagger\hat{a}_2^\dagger\tanh\zeta}e^{-(\hat{a}_1^\dagger\hat{a}_1 + \hat{a}_2^\dagger\hat{a}_2)\ln(\cosh\zeta)}e^{\hat{a}_1\hat{a}_2\tanh\zeta}, \tag{17}$$

at the time T_π the state of the two cavity modes is

$$|\psi\rangle_c = \frac{1}{\cosh\zeta}\sum_{n=0}^{\infty}(\tanh\zeta)^n|n,n\rangle_c$$
$$= \left(\frac{1-r^2}{1+r^2}\right)\sum_{n=0}^{\infty}\left(\frac{2r}{1+r^2}\right)^n|n,n\rangle_c. \tag{18}$$

The state (18) is a two-mode squeezed state of the photon fields in the two cavities, which exhibits Einstein-Podolsky-Rosen (EPR) entanglement. The mechanical motion of the MR plays a fundamental role in establishing the entanglement, nevertheless the initial motional state does not affect the efficiency of the scheme. The degree of squeezing (squeeze parameter ζ) is determined by the ratio of Θ_2 to Θ_1, which can be controlled on demand through tuning the driving signals. When the squeezed state is generated at the time of T_π, we switch off the couplings between the CPWC's and the MR. Then the squeezed state can be preserved until the cavity fields are coupled out.

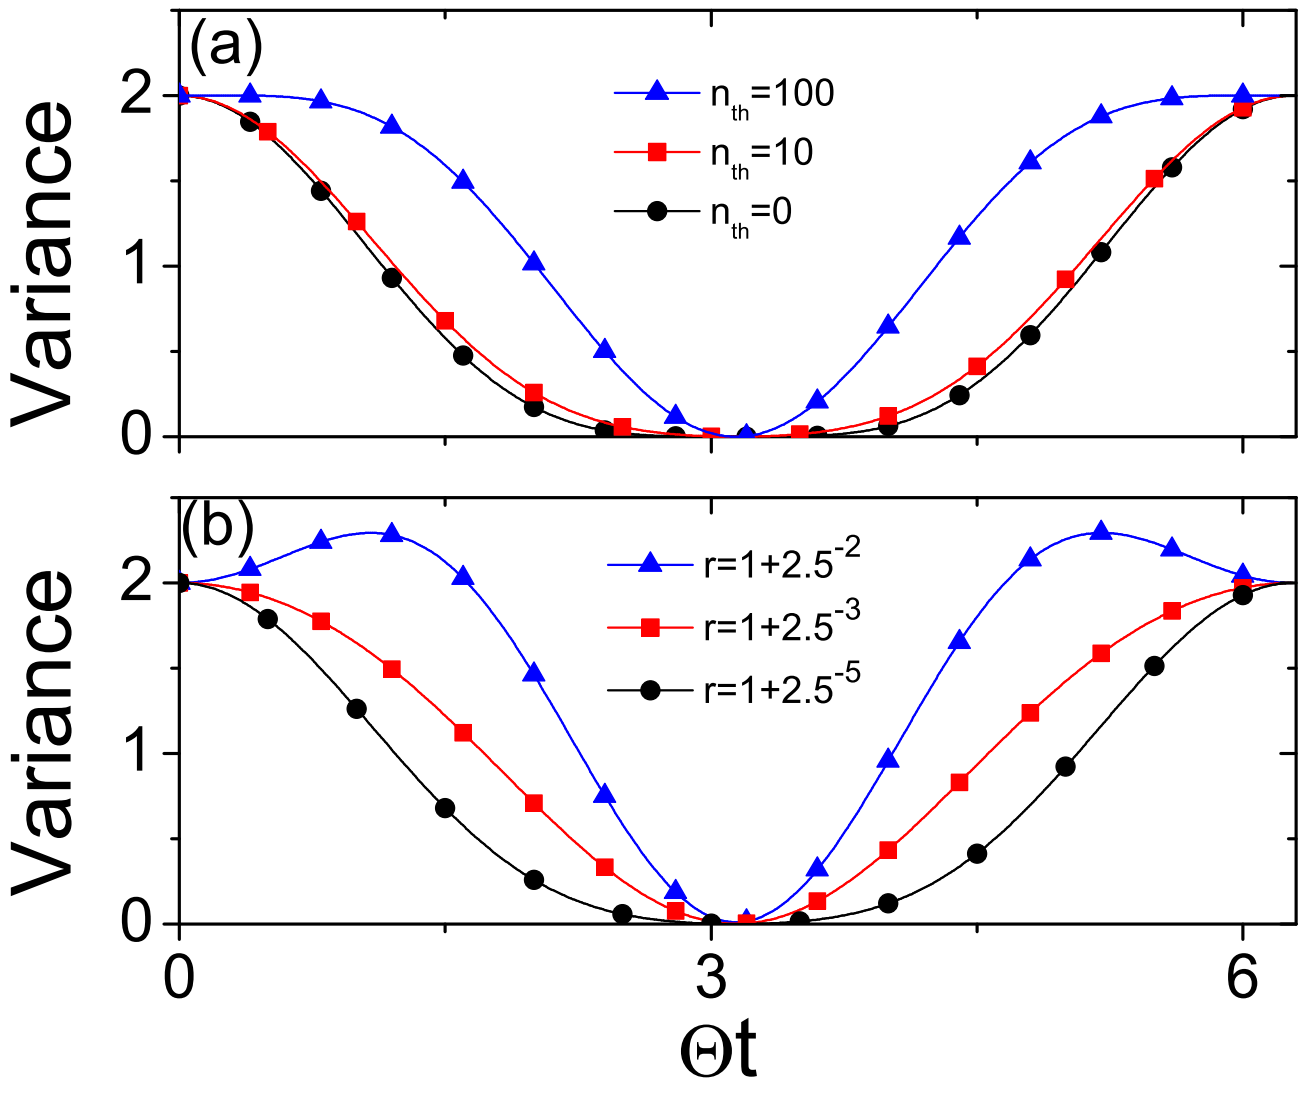

Figure 2. (Color online) The total variance V versus Θt for different values of the parameters n_{th} and r: (a) $n_{th} = 0, 10, 10^2$, $r = 1 + 2.5^{-5}$; (b) $r = 1 + 2.5^{-2}, 1 + 2.5^{-3}, 1 + 2.5^{-5}$, n_{th}=10.

In order to check the above analysis, we exploit the total variance $V = \langle(\Delta\hat{u})^2 + (\Delta\hat{v})^2\rangle$ of a pair of EPR-like operators $\hat{u} = \hat{X}_1 - \hat{X}_2$, and $\hat{v} = \hat{P}_1 + \hat{P}_2$ [55], with $\hat{X}_j = (\hat{a}_j + \hat{a}_j^\dagger)/\sqrt{2}$, and $\hat{P}_j = -i(\hat{a}_j - \hat{a}_j^\dagger)/\sqrt{2}, j = 1, 2$. According to Ref. [55], a two-mode Gaussian state is entangled if and only if $V < 2$. For the two-mode squeezed vacuum state $\hat{S}^\dagger(\zeta)|00\rangle_c$, the total variance $V = \langle(\Delta\hat{u})^2 + (\Delta\hat{v})^2\rangle = 2e^{-2\zeta}$, implying this state exhibits EPR entanglement. In Fig. 2, the quantity V is plotted versus the scaled time Θt, for different values of the initial thermal phonon number n_{th} and the parameter r. Fig. 2(a) shows the total variance V as a function of the scaled time Θt under different values of the thermal phonon number n_{th} for a fixed parameter r. From

Fig. 2(a) it can be found that the total variance V is unaffected by thermal noise at the instant T_π, i.e., at half period it is independent on the initial thermal phonon number n_{th}. This result can be understood since our discussions hold under the conditions that the couplings of the system to the thermal reservoirs can be neglected. In such a case the coherent dynamics is purely governed by the Hamiltonian (4) and thermal effects enter only as an initial condition for the mechanical mode. Fig. 2(b) displays V versus Θt under different values of the ratio r with a fixed mean phonon number n_{th}. We find that at half period the two CPWC's are steered into a two-mode squeezed state starting from a thermal state for the MR. The degree of squeezing and the total variance for the two-mode squeezed state is determined by the parameter r. These numerical results are in accordance with the analytical conclusions above.

3.2. Two-mode squeezed states at steady state through a dissipative dynamical process

In the previous section, we have discussed how to prepare a two-mode squeezed state for the CPWC's via coherent control on the evolution of the coupled system. Though the protocol seems promising, the experimental implementation of this scheme requires stringent conditions, i.e., the coupling to the environment reservoirs should be neglected, thus requiring very high quality factors for both the CPWC's and MR's. For superconducting CPWC's, this condition can be fulfilled since high-Q superconducting stripline cavities are easy to be fabricated in the laboratory. However, as for the mechanical oscillator, in particular which has to be incorporated into a capacitor in order to couple to the CPWC's, this requirement is too demanding. In addition, high frequency MR's are required when the quantum regime is entered. However at present these GHz mechanical oscillators are plagued by very low quality factors. It is known that MR performance degrades considerably as the oscillating frequency increases. In this section, we will present an alternative scheme which exploits the mechanical dissipation as a useful resource and only needs high frequency low-Q mechanical oscillators.

In what follows, the system-environment interaction is assumed Markovian, and then is described by a master equation in Lindblad form. We assume that the CPWC's couple with the vacuum bath, but the MR couples with a thermal bath. Then the time evolution of the density operator $\hat{\rho}$ for the whole system is described by the master equation

$$\frac{d\hat{\rho}}{dt} = -\frac{i}{\hbar}[\mathscr{H}, \hat{\rho}] + \mathscr{L}_{c_1}\hat{\rho} + \mathscr{L}_{c_2}\hat{\rho} + \mathscr{L}_m\hat{\rho}, \tag{19}$$

where

$$\begin{aligned}\mathscr{L}_{c_j}\hat{\rho} &= \frac{\kappa_j}{2}(2\hat{a}_j\rho\hat{a}_j^\dagger - \hat{a}_j^\dagger\hat{a}_j\rho - \rho\hat{a}_j^\dagger\hat{a}_j),\\ \mathscr{L}_m\hat{\rho} &= \frac{\gamma_m}{2}(n_{th}+1)(2\hat{b}\rho\hat{b}^\dagger - \hat{b}^\dagger\hat{b}\rho - \rho\hat{b}^\dagger\hat{b})\\ &\quad + \frac{\gamma_m}{2}n_{th}(2\hat{b}^\dagger\rho\hat{b} - \hat{b}\hat{b}^\dagger\rho - \rho\hat{b}\hat{b}^\dagger).\end{aligned} \tag{20}$$

In the following we focus on the regime where $\gamma_m \gg \{\Theta_1, \Theta_2\} \gg \{\kappa_1, \kappa_2, n_{th}\gamma_m\}$. The condition $\gamma_m \gg \{\Theta_1, \Theta_2\}$ corresponds to strong mechanical damping for the MR, i.e., very low quality factors, while $n_{th}\gamma_m \ll \gamma_m$ implies near zero temperature for the mechanical modes, thus requiring ground state cooling of the MR. In effect, in the regime of large mechanical frequency (in the GHz range) and at cryogenic temperature, the thermal phonon number is nearly zero, i.e., $n_{th} = (e^{\hbar\omega_m/k_B T} - 1)^{-1} \simeq 0$, which corresponds to coupling with the vacuum bath for the MR. Under this regime the master equation (19) then can be approximated as

$$\frac{d\hat{\rho}}{dt} = -\frac{i}{\hbar}[\mathscr{H}, \hat{\rho}] + \frac{\gamma_m}{2}(2\hat{b}\rho\hat{b}^\dagger - \hat{b}^\dagger\hat{b}\rho - \rho\hat{b}^\dagger\hat{b}). \tag{21}$$

We now introduce the phonon number representation for the density operator $\hat{\rho}$, i.e., $\hat{\rho} = \sum_{m,n=0}^{\infty} \rho_{mn}|m\rangle\langle n|$, where ρ_{mn} are the density-matrix elements in the basis of the phonon number states $\{|n\rangle, n = 0, 1, 2, ...\}$, and are still operators with respect to the cavity fields. Under the condition of strong mechanical damping, the populations of the highly excited motional states can be neglected. Therefore, we consider only the matrix elements ρ_{mn} inside the subspace $\{|0\rangle, |1\rangle\}$ of the phonon numbers. In this case, the master equation (21) leads to the following set of coupled equations of motion for the density-matrix elements

$$\dot{\rho}_{00} = -i\rho_{01}(\Theta_1\hat{a}_1^\dagger + \Theta_2\hat{a}_2) + i(\Theta_1\hat{a}_1 + \Theta_2\hat{a}_2^\dagger)\rho_{10} + \gamma_m\rho_{11}, \tag{22}$$

$$\dot{\rho}_{11} = -i\rho_{10}(\Theta_1\hat{a}_1 + \Theta_2\hat{a}_2^\dagger) + i(\Theta_1\hat{a}_1^\dagger + \Theta_2\hat{a}_2)\rho_{01} - \gamma_m\rho_{11}, \tag{23}$$

$$\dot{\rho}_{01} = -i\rho_{00}(\Theta_1\hat{a}_1 + \Theta_2\hat{a}_2^\dagger) + i(\Theta_1\hat{a}_1 + \Theta_2\hat{a}_2^\dagger)\rho_{11} - \frac{\gamma_m}{2}\rho_{01}. \tag{24}$$

In the regime of strong damping rate γ_m, the elements ρ_{01} and ρ_{11} can be adiabatically eliminated from the above equations [56], leading to

$$\rho_{01} = \frac{2i\Theta}{\gamma_m}(\mathscr{D}^\dagger\rho_{11} - \rho_{00}\mathscr{D}^\dagger) \tag{25}$$

with

$$\mathscr{D} = \frac{\Theta_2}{\Theta}\hat{a}_2 + \frac{\Theta_1}{\Theta}\hat{a}_1^\dagger. \tag{26}$$

The reduced density operator for the CPWC's can be approximated as $\hat{\varrho}_c = \mathrm{Tr}_m(\hat{\rho}) \simeq \rho_{00} + \rho_{11}$. Replacing (25) into (22) and (23), and adding up them, after neglecting higher-order terms we obtain the evolution of the cavity modes with an effective master equation

$$\frac{d\hat{\varrho}_c}{dt} = \frac{\Gamma_c}{2}(2\mathscr{D}\hat{\varrho}_c\mathscr{D}^\dagger - \mathscr{D}^\dagger\mathscr{D}\hat{\varrho}_c - \hat{\varrho}_c\mathscr{D}^\dagger\mathscr{D}) \tag{27}$$

with $\Gamma_c = 4\Theta^2/\gamma_m$. This master equation has the form of the standard engineering reservoir scheme. The only pure steady state of the system is the eigenstate $|\psi\rangle$ of the operator $\mathscr{D}$ with zero eigenvalue, ensuring that there is no further eigenstate $|\phi\rangle$ of $\mathscr{D}$ such that $[\mathscr{D}, \mathscr{D}^\dagger]|\phi\rangle = 0$. For the operator $\mathscr{D} = \frac{\Theta_2}{\Theta}\hat{a}_2 + \frac{\Theta_1}{\Theta}\hat{a}_1^\dagger$, we will find that this condition cannot be satisfied. From the eigenvalue equation $\mathscr{D}|\psi\rangle = 0$, and the relation $\mathscr{D} = \mathcal{S}\hat{a}_2\mathcal{S}^\dagger$, with $\mathcal{S}(\varsigma) = e^{\varsigma\hat{a}_1\hat{a}_2 - \varsigma\hat{a}_1^\dagger\hat{a}_2^\dagger}$, $\varsigma = \tanh^{-1}[\Theta_1/\Theta_2]$, one can readily find that

$$|\psi\rangle_c = \mathcal{S}|\mu, 0\rangle_c \tag{28}$$

is a steady state of the master equation (27), but not the only one [57, 58]. Here $|\mu, 0\rangle_c$ denotes an arbitrary state for the first CPWC mode and the vacuum state for the second one.

In order to steer the system into the two-mode squeezed state $\mathcal{S}|0,0\rangle_c$, we need another dissipative process together with the described one, leading to the effective master equation

$$\begin{aligned}\frac{d\hat{\varrho}_c}{dt} &= \frac{\Gamma_c}{2}(2\tilde{\mathscr{D}}\hat{\varrho}_c\tilde{\mathscr{D}}^\dagger - \tilde{\mathscr{D}}^\dagger\tilde{\mathscr{D}}_1\hat{\varrho}_c - \hat{\varrho}_c\tilde{\mathscr{D}}^\dagger\tilde{\mathscr{D}}) \\ &\quad + \frac{\Gamma_c}{2}(2\mathscr{D}\hat{\varrho}_c\mathscr{D}^\dagger - \mathscr{D}^\dagger\mathscr{D}\hat{\varrho}_c - \hat{\varrho}_c\mathscr{D}^\dagger\mathscr{D}) \end{aligned} \tag{29}$$

with the operator $\tilde{\mathscr{D}} = \mathcal{S}\hat{a}_1\mathcal{S}^\dagger$. This master equation describes simultaneous ground state cooling of the system in the transformed picture with the basis $\tilde{\mathscr{D}}, \mathscr{D}$ [59, 60]. In fact, one can find that $\tilde{\mathscr{D}}\mathcal{S}|0,0\rangle_c = \mathscr{D}\mathcal{S}|0,0\rangle_c = 0$, and $[\tilde{\mathscr{D}}, \mathscr{D}] = 0$. Therefore, the unique steady state of master equation (29) is just $\mathcal{S}|0,0\rangle_c$. The Lindblad term with respect to the $\tilde{\mathscr{D}}$ operator can be engineered from the Hamiltonian

$$\mathscr{H}' = -\hbar\Theta_1(\hat{a}_1^\dagger\hat{b} + \hat{a}_1\hat{b}^\dagger) - \hbar\Theta_2(\hat{a}_2^\dagger\hat{b}^\dagger + \hat{a}_2\hat{b}), \tag{30}$$

following the same reasoning as that for the $\mathscr{D}$ operator, with the driving frequencies chosen as $\omega_d^1 = |\omega_m - \omega_1|$, and $\omega_d^2 = \omega_2 + \omega_m$. However, for the case of just one MR, we cannot get the master equation (29) to realize simultaneous cooling of both modes $\tilde{\mathscr{D}}$ and $\mathscr{D}$, since both $\mathscr{H}$ and $\mathscr{H}'$ cannot be possessed simultaneously only through adjusting the driving frequencies for one MR. In order to have both cooling processes, in $\tilde{\mathscr{D}}$ and $\mathscr{D}$, we can employ a stroboscopic cooling scheme. In this approach, the system evolves during a time t in N cycles of duration $\delta t = t/N$, while the driving parameters alternate between the ones with respect to $\tilde{\mathscr{D}}$ and those of $\mathscr{D}$. The stroboscopic limit is valid provided that the time interval δt is much smaller than $1/\Gamma$, in which case the effective dynamics of the system is just as that described by the master equation (29). Alternatively, one can couple the CPWC's with two MR's, each of which is driven by a bichromatic microwave signal to induce sidebands in the CPWC-MR coupling. In this case, one can realize the Hamiltonian $\mathscr{H}$ for one MR, and simultaneously have the Hamiltonian $\mathscr{H}'$ for the other. In the regime of strong mechanical damping for both MR's, one can exploit the engineering reservoir scheme to get the effective master equation (29).

It is necessary to verify the model through numerical simulations. To provide an example, here we consider the two-MR case, where the dynamics of the system can be simulated by the following master equation

$$\frac{d\hat{\rho}}{dt} = -\frac{i}{\hbar}[\mathscr{H}, \hat{\rho}] + \mathscr{L}_{c_1}\hat{\rho} + \mathscr{L}_{c_2}\hat{\rho} + \mathscr{L}_{m_1}\hat{\rho} + \mathscr{L}_{m_2}\hat{\rho}, \tag{31}$$

with

$$\begin{aligned}\mathscr{H} &= -\hbar\Theta_1(\hat{a}_1^\dagger\hat{b}_1^\dagger + \hat{a}_1\hat{b}_1) - \hbar\Theta_2(\hat{a}_2^\dagger\hat{b}_1 + \hat{a}_2\hat{b}_1^\dagger) \\ &\quad - \hbar\Theta_1(\hat{a}_1^\dagger\hat{b}_2 + \hat{a}_1\hat{b}_2^\dagger) - \hbar\Theta_2(\hat{a}_2^\dagger\hat{b}_2^\dagger + \hat{a}_2\hat{b}_2) \qquad (32) \\ \mathscr{L}_{m_j}\hat{\rho} &= \frac{\gamma_{m_j}}{2}(n_{th}+1)(2\hat{b}_j\hat{\rho}\hat{b}_j^\dagger - \hat{b}_j^\dagger\hat{b}_j\hat{\rho} - \hat{\rho}\hat{b}_j^\dagger\hat{b}_j)\end{aligned}$$

$$+\frac{\gamma_{m_j}}{2}n_{th}(2\hat{b}_j^\dagger\hat{\rho}\hat{b}_j-\hat{b}_j\hat{b}_j^\dagger\hat{\rho}-\hat{\rho}\hat{b}_j\hat{b}_j^\dagger). \tag{33}$$

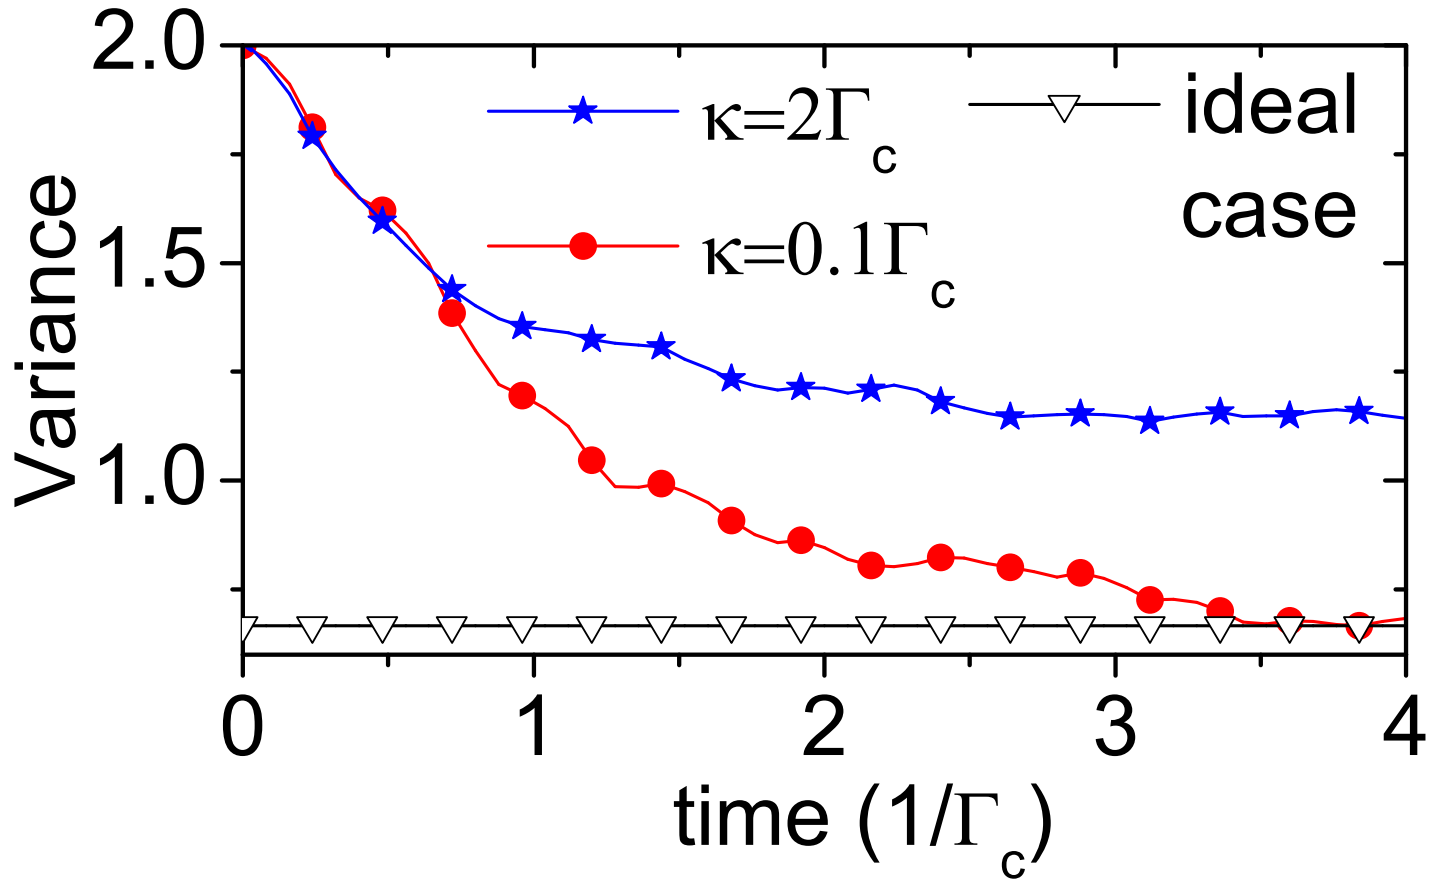

Figure 3. (Color online) Plot of time evolution of the total variance V through numerically solving the master equation (31), together with the result for an ideal two-mode squeezed vacuum state. The relevant parameters are chosen as $\Theta_2=2\Theta_1$, $\gamma_{m_1}\simeq\gamma_{m_2}\simeq\gamma_m=15\Theta_1, n_{th}=0.01$.

In Fig. 3 we illustrate the time evolution of the total variance V together with the result for an ideal two-mode squeezed vacuum state, under different values for the decay rate κ, where $\kappa_1\simeq\kappa_2\simeq\kappa$ is assumed. The initial state of the system is chosen as the ground states for the cavity modes and the mechanical modes. The related parameters are chosen in such a way that they are within the parameter range for which this scheme is valid and are accessible with current experimental setups. From this figure we find that, when the effective decay rate for the engineered reservoir is much larger than the decay rate of the cavity photons, i.e., $\Gamma_c\gg\kappa$, at steady state nearly ideal EPR entanglement $(\Theta_2/\Theta_1=2, V=0.667)$ between the photon fields in the two CPWC's can be established with a fidelity of 99.98%. The time for reaching the stationary state is about $T\simeq 4/\Gamma_c$. However, when κ is of the same order of magnitude of or larger than Γ_c, the ideal EPR entanglement is severely spoiled, since in this case the influence of the natural reservoir on the generated two-mode squeezed state is almost the same as that of the engineered reservoir. Thus, to reduce the influence of the natural reservoir requires $\Gamma_c\gg\kappa$, or $4\Theta^2\gg\gamma_m\kappa$. To make sure the protocol is valid, we also require that $\gamma_m\gg\Theta$. These conditions together imply that $\gamma_m\gg\Theta\gg\sqrt{\gamma_m\kappa}/2$.

4. Implementation

Regarding the experimental feasibility of the proposals, currently available experimental setups of cavity electromechanics [2, 8] are promising platforms for realizing the schemes.

We consider superconducting CPWC's with the fundamental frequency of $2\pi \times 10$ GHz, whose damping rate can be as low as $\kappa/2\pi \simeq 10$ kHz given a quality factor $Q = 10^6$ from recent circuit QED experiments. The vacuum-fluctuations-induced voltage between the central conductor and the ground plane of the CPWC's is typically of order of μV. As for the nanoscale MR's, we can choose to utilize an aluminium membrane integrated into a capacitor [2] for the first scheme, or a piezoelectric dilatation resonator [7] for the second one, which comprises a piezoelectric thin film of aluminium nitride, sandwiched between two aluminium metal electrodes. The superconducting CPWC's and nano MR's can be fabricated on a single chip with wafer-scale optical lithographic techniques. For a nearly circular membrane with a diameter of 15 μm and a thickness of 100 nm [2], drum-like modes are allowed to resonate freely. The fundamental mode is $\omega_m/2\pi = 10.69$ MHz, giving a zero-point motion of 4.1 fm and a damping rate $\gamma_m/2\pi = 30$ Hz [2]. For the first scheme, with the chosen parameters $V_x^1 = 10$ V, $V_x^2 = 1.01V_x^1$, $d = 50$ nm, $C_0 = 40$ fF, we get $\Theta \sim 3$ MHz, and the operation time for generating the target state is about $T_\pi \sim 1$ μs. This time is much shorter than the photon life time, and the decoherence time for the mechanical mode with about 10^3 phonons. With regard to the second scheme, the piezoelectric dilatation resonator is particularly suitable [7], which has 6 GHz frequency and very strong damping rate $\gamma_m/2\pi \simeq 23$ MHz ($Q \simeq 260$). At the temperature $T \simeq 25$ mK, the number of thermal phonons in the mechanical mode is less than 0.07. If we assume that $V_x^1 = 1$ V, $V_x^2 = 2V_x^1$, $d = 50$ nm, $C_0 = 25$ fF, then we have $\Theta \sim 17$ MHz. The time for reaching the stationary state is about $4/\Gamma_c \sim 0.5$ μs.

5. Conclusions

To conclude, we have investigated a circuit cavity electromechanical system, in which two CPWC's are capacitively coupled by a MR. With this cavity electromechanical system, we have presented two different schemes to generate two-mode continuous-variable entangled states of microwave electromagnetic fields confined in the cavities. The first scheme, operating in the strong coupling regime, is based on coherent control over the dynamics of the system, and is insensitive to the initial thermal noise. The second one is based on a dissipative quantum dynamical process, which exploits the mechanical dissipation as a useful resource and only needs high frequency low-Q mechanical oscillators. These protocols may have interesting applications in quantum information processing with electromechanical systems.

Acknowledgments

This work is supported by the NNSF of China under Grant No. 11104215, the Special Prophase Project in the National Basic Research Program of China under Grant No. 2011CB311807, and the Research Fund for the Doctoral Program of Higher Education of China under Grant No. 20110201120035.

References

[1] Regal C A and Lehnert K W 2011 From cavity electromechanics to cavity optomechanics *J. Phys. Conf. Ser.* 264 012025

[2] Teufel J D, Li Dale, Allman M S, Cicak K, Sirois A J, Whittaker J D and Simmonds R W 2011 Circuit cavity electromechanics in the strong-coupling regime *Nature* 471 204–8

[3] Didier N and Fazio R 2012 Putting mechanics into circuit quantum electrodynamics *C. R. Physique* 13 470–9

[4] Poot M and van der Zant H S J 2012 Mechanical systems in the quantum regime *Phys. Rep.* 511 273–335

[5] Kippenberg T J and Vahala K J 2008 Cavity optomechanics: Back-action at the mesoscale *Science* 321 1172–6

[6] Marquardt F and Girvin S M 2009 Optomechanics *Physics* 2 40

[7] OConnell A D, Hofheinz M, Ansmann M, Bialczak Radoslaw C, Lenander M, Lucero Erik, Neeley M, Sank D, Wang H, Weides M, Wenner J, Martinis J M and Cleland A N 2010 Quantum ground state and single-phonon control of a mechanical resonator *Nature* 464 697–703

[8] Massel F, Heikkila T T, Pirkkalainen J M, Cho S U, Saloniemi H, Hakonen P J and Sillanpaa M A 2011 Microwave amplification with nanomechanical resonators *Nature* 480:351–4

[9] Rabl P, Kolkowitz S J, Koppens F H L, Harris J G E, Zoller P and Lukin M D 2010 A quantum spin transducer based on nanoelectromechanical resonator arrays *Nat. Phys.* 6 602–8

[10] Wilson-Rae I, Nooshi N, Zwerger W and Kippenberg T J 2007. Theory of ground state cooling of a mechanical oscillator using dynamical backaction *Phys. Rev. Lett.* 99 093901

[11] Marquardt F, Chen J P, Clerk A A and Girvin S M 2007 Quantum theory of cavity-assisted sideband cooling of mechanical motion *Phys. Rev. Lett.* 99 093902

[12] Dobrindt J M, Wilson-Rae I and Kippenberg T J 2008 Parametric normal-mode splitting in cavity optomechanics *Phys. Rev. Lett.* 101 263602

[13] Stannigel K, Rabl P, Zoller A S, Sorensen P and Lukin M D 2010 Optomechanical transducers for long-distance quantum communication *Phys. Rev. Lett.* 105 220501

[14] Fiore V, Yang Y, Kuzyk M C, Barbour R, Tian L and H L Wang 2011 Storing optical information as a mechanical excitation in a silica optomechanical resonator *Phys. Rev. Lett.* 107 133601

[15] Romero-Isart O, Clemente L, Navau C, Sanchez A and Cirac J I 2012 Quantum magnetomechanics with levitating superconducting microspheres *Phys. Rev. Lett.* 109 147205

[16] Cirio M, Brennen G K and Twamley J 2012 Quantum magnetomechanics: ultrahigh-Q-levitated mechanical oscillators *Phys. Rev. Lett.* 109 147206

[17] Regal C A, Teufel J D and Lehnert K W 2008 Measuring nanomechanical motion with a microwave cavity interferometer *Nat. Phys.* 4 555–60

[18] Winger M, Blasius T D, Mayer Alegre T P, Safavi-Naeini A H, Meenehan S, Cohen J, Stobbe S and Painter O 2011 A chip-scale integrated cavity-electro-optomechanics platform *Opt. Express* 19 24905–21

[19] Masse F, Cho S U, Pirkkalainen J-M, Hakonen P J, Heikkila T T and Sillanpaa M A 2012 Multimode circuit optomechanics near the quantum limit *Nat. Commun.* 3 987

[20] Taylor J M, Sorensen A S, Marcus C M and Polzik E S 2011 Laser cooling and optical detection of excitations in a lc electrical circuit *Phys. Rev. Lett.* 107 273601

[21] Cleland A N and Geller M R 2004 Superconducting qubit storage and entanglement with nanomechanical resonators *Phys. Rev. Lett.* 93 070501

[22] Stannigel K, Komar P, Habraken S J M, Bennett S D, Lukin M D, Zoller P and Rabl P 2012 Optomechanical quantum information processing with photons and phonons *Phys. Rev. Lett.* 109 013603

[23] Barzanjeh Sh, Abdi M, Milburn G J, Tombesi P and Vitali D 2012 Reversible optical-to-microwave quantum interface *Phys. Rev. Lett.* 109 130503

[24] Ludwig M, Safavi-Naeini A H, Painter O and Marquardt F 2012 Enhanced quantum nonlinearities

in a two-mode optomechanical system *Phys. Rev. Lett.* 109 063601

[25] Xuereb A, Genes C and Dantan A 2012 Strong coupling and long-range collective interactions in optomechanical arrays *Phys. Rev. Lett.* 109 223601

[26] Teufel D, Harlow J W, Regal C A and Lehnert K W 2008 Dynamical backaction of microwave fields on a nanomechanical oscillator *Phys. Rev. Lett.* 101 197203

[27] Teufel J D, Regal C A and Lehnert K W 2008 Prospects for cooling nanomechanical motion by coupling to a superconducting microwave resonator *New J. Phys.* 10 095002

[28] Didier N, Pugnetti S, Blanter Y M and Fazio R 2011 Detecting phonon blockade with photons *Phys. Rev. B* 84 054503

[29] Li J J and Zhua K D 2012 Nonlinear optical mass sensor with an optomechanical microresonator *Appl. Phys. Lett.* 101 141905

[30] Padurariu C, Keijzers C J H and Nazarov Yu V 2012 Effect of mechanical resonance on josephson dynamics *Phys. Rev. B* 86 155448

[31] Safavi-Naeini A H, Chan J, Hill J T, Alegre T P M, Krause A and Painter O 2012 Observation of quantum motion of a nanomechanical resonator *Phys. Rev. Lett.* 108 033602

[32] Armour A D, Blencowe M P and Schwab K C 2002 Entanglement and decoherence of a micromechanical resonator via coupling to a cooper-pair box *Phys. Rev. Lett.* 88 148301

[33] Zhou X and Mizel A 2006 Nonlinear coupling of nanomechanical resonators to josephson quantum circuits *Phys. Rev. Lett.* 97 267201

[34] Hartmann M J and Plenio M B 2008. Steady state entanglement in the mechanical vibrations of two dielectric membranes *Phys. Rev. Lett.* 101 200503

[35] Tian L, Allman M S and Simmonds R W 2008 Parametric coupling between macroscopic quantum resonators *New J. Phys.* 10 115001

[36] Mari A and Eisert J 2012 Opto- and electro-mechanical entanglement improved by modulation *New J. Phys.* 14 075014

[37] Schmidt M, Ludwig M and Marquardt F 2012 Optomechanical circuits for nanomechanical continuous variable quantum state processing *New J. Phys.* 14 125005

[38] Clerk A A, Marquardt F and Jacobs K 2008 Back-action evasion and squeezing of a mechanical resonator using a cavity detector *New J. Phys.* 10 095010

[39] Vitali D, Tombesi P, Woolley M J, Doherty A C and Milburn G J 2007 Entangling a nanomechanical resonator and a superconducting microwave cavity *Phys. Rev. A* 76 042336

[40] Woolley M J, Doherty A C, Milburn G J and Schwab K C 2008 Nanomechanical squeezing with detection via a microwave cavity. *Phys. Rev. A* 78 062303

[41] Barzanjeh Sh, Vitali D, Tombesi P and Milburn G J 2011 Entangling optical and microwave cavity modes by means of a nanomechanical resonator *Phys. Rev. A* 84 042342

[42] Rabl P, Shnirman A and Zoller P 2004 Generation of squeezed states of nanomechanical resonators by reservoir engineering *Phys. Rev. B* 70 205304

[43] Joshi C, Larson J, Jonson M, Andersson E and Ohberg P 2012 Entanglement of distant optomechanical systems *Phys. Rev. A* 85 033805

[44] Seok H, Buchmann L F, Singh S, Steinke S K and Meystre P 2012 Generation of mechanical squeezing via magnetic dipoles on cantilevers *Phys. Rev. A* 85 033822

[45] Voje A, Kinaret J M and Isacsson A 2012 Generating macroscopic superposition states in nanomechanical graphene resonators *Phys. Rev. B* 85 205415

[46] Heinrich G and Marquardt F 2011 Coupled multimode optomechanics in the microwave regime *Europhys. Lett.* 93 18003

[47] Akram U, Munro W, Nemoto K and Milburn G J 2012 Photon-phonon entanglement in coupled optomechanical arrays *Phys. Rev. A* 86 042306

[48] Blais A, Huang R-S, Wallraff A, Girvin S M and Schoelkopf R J 2004 Cavity quantum electrodynamics for superconducting electrical circuits: An architecture for quantum computation *Phys. Rev. A* 69 062320

[49] Wang Y-D and Clerk A A 2012 Using interference for high fidelity quantum state transfer in

optomechanics *Phys. Rev. Lett.* 108 153603

[50] Tian L 2012 Adiabatic state conversion and pulse transmission in optomechanical systems *Phys. Rev. Lett.* 108 153604

[51] Li P B and Li F L 2010 Controlled generation of field squeezing with cold atomic clouds coupled to a superconducting transmission line resonator *Phys. Rev. A* 81 035802

[52] Pirandola S, Mancini S, Vitali D and Tombesi P 2003 Continuous-variable entanglement and quantum-state teleportation between optical and macroscopic vibrational modes through radiation pressure *Phys. Rev. Lett.* 68 062317

[53] Pirandola S, Mancini S, Vitali D and Tombesi P 2003 Continuous variable entanglement by radiation pressure *J. Opt. B: Quantum Semiclass. Opt.* 5 S523–9

[54] Schumaker B L and Caves C M 1985 New formalism for two-photon quantum optics. II. mathematical foundation and compact notation *Phys. Rev. A* 31 3093–111

[55] Duan L-M, Giedke G, Cirac J I and Zoller P 2000 Inseparability criterion for continuous variable systems *Phys. Rev. Lett.* 84 2722–5

[56] Li P B, Gao S Y, Li H R, Ma S L and Li F L 2012 Dissipative preparation of entangled states between two spatially separated nitrogen-vacancy centers *Phys. Rev. A* 85 042306

[57] Li P B and Li F L 2011 Engineering squeezed states of microwave radiation with circuit quantum electrodynamics *Phys. Rev. A* 83 035807

[58] Li P B, Gao S Y and Li F L 2012 Engineering two-mode continuous-variable entangled states of distant atomic spin ensembles with superconducting quantum circuits *Phys. Rev. A* 85 014303

[59] Porras D and Garcia-Ripoll J J 2012 Shaping an itinerant quantum field into a multimode squeezed vacuum by dissipation *Phys. Rev. Lett.* 108 043602

[60] Li P B, Gao S Y and Li F L 2012 Engineering two-mode entangled states between two superconducting resonators by dissipation *Phys. Rev. A* 86 012318